



Turn to the Experts.




Better **comfort** and **power saving** – the Carrier Aspire range of Inverter Hi-Walls with DC Inverter technology balanced with **efficiency levels** to give you a **comfortable heating or cooling solution**.

**Aspire**  
INVERTER HI-WALL



- Cooling performance even at 48°C outdoor temperature and as low as -15°C for heating
- Customised air distribution: with three fan speeds
- Automatic error diagnosis
- Hidden display: light can be turned off by remote controller when unit is running
- Louver position memory: when starting the unit (after shutting down), the louvers will restore to the angle originally set by the user
- Silent mode: the indoor unit can operate at a lower noise level. This occurs as the fan speed can shift lower, thereby reducing the sound of the indoor unit
- Follow me: the sensor built into the remote controller is active and the air conditioner will regulate the room temperature based on the temperature around the remote controller
- 5 year warranty for consumer confidence

## Features

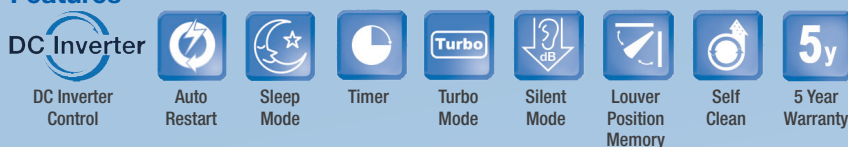

INDOOR			42QHF025	42QHF036	42QHF050	42QHF060	42QHF065	42QHF080
OUTDOOR			38QHF025	38QHF036	38QHF050	38QHF060	38QHF065	38QHF080
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Power Supply (Volts-Phase-Hz)			220-240V, 1Ph, 50Hz	220-240V, 1Ph, 50Hz	220-240V, 1Ph, 50Hz	220-240V, 1Ph, 50Hz	220-240V, 1Ph, 50Hz	220-240V, 1Ph, 50Hz
COOLING	Capacity - Rated (Range)	kW	2.50(1.25~3.50)	3.60(1.40~4.40)	4.89(1.60~5.30)	5.93(1.80~6.70)	6.30(1.85~6.90)	8.00(3.40~8.50)
	Power Input - Rated (Range)	kW	0.61(0.30~1.15)	0.88(0.35~1.20)	1.44(0.40~1.80)	1.80(0.50~2.40)	1.91(0.55~2.30)	2.35(0.80~2.70)
	Efficiency - Rated (Range)	EER	4.10(3.00~4.50)	4.10(3.60~4.70)	3.40(2.90~4.40)	3.30(2.80~4.00)	3.30(3.00~3.90)	3.40(3.10~4.40)
	Operating Current (Range)	A	2.8(1.4~5.3)	3.9(1.6~5.4)	6.4(1.8~8.0)	7.9(2.2~10.5)	8.6(2.5~10.3)	10.4(3.6~12.0)
HEATING	Capacity - Rated (Range)	kW	2.70(1.10~4.00)	3.80(1.10~4.80)	5.50(1.40~6.00)	6.50(1.60~7.10)	7.40(1.70~7.60)	9.00(3.10~9.90)
	Power Input - Rated (Range)	kW	0.68(0.30~1.50)	0.95(0.30~1.60)	1.62(0.40~2.00)	1.97(0.50~2.50)	2.24(0.50~2.40)	2.50(0.80~3.10)
	Efficiency - Rated (Range)	COP	4.00(2.70~4.50)	4.00(3.10~4.60)	3.40(3.00~4.60)	3.30(2.90~4.20)	3.30(3.00~4.10)	3.60(3.20~4.80)
	Operating Current (Range)	A	3.1(1.3~6.7)	4.2(1.3~7.1)	7.1(1.8~8.8)	8.7(2.2~11.0)	9.8(2.2~10.5)	11.1(3.6~13.8)
INDOOR UNIT	Dimension (WxDxH)	mm	800x188x275	940x205x275	940x205x275	1045x235x315	1045x235x315	1260x283x363
	Net Weight	kg	7.5	9.5	9.5	13.0	13.0	19.0
	Cooling Airflow (H/M/L)	L/s	161/139/114	203/175/156	211/178/158	319/267/236	319/267/236	372/300/256
	Moisture Removal	L/hr	0.5	0.7	1.6	1.8	1.9	2.4
	Cooling - (Sound Pressure) (H/M/L) - 1m	dBA (@spl)	41/37/33	44/41/38	44/41/38	50/45/42	51/46/42	51/45/39
	Cooling Sound Power (H)		52	55	55	61	62	62
	Heating - (Sound Pressure) (H/M/L) - 1m	dBA (@spl)	41/37/33	44/41/38	44/41/38	50/45/42	51/46/42	51/45/39
	Heating - (Sound Power) (H)	dBA (@swl)	52	55	55	61	62	62
OUTDOOR UNIT	Dimension (WxDxH)	mm	780x250x540	810x310x558	810x310x558	845x320x700	900x315x860	900x315x860
	Net Weight	kg	30.0	35.0	37.0	48.0	56.5	60.0
	Compressor Type		rotary	rotary	rotary	twin rotary	twin rotary	twin rotary
	Fan Motor Output	W	36	40	40	53	100	72
	Cooling - (Sound Pressure) (H) at 1m distance	dBA (@spl)	55	56	57	61	62	61
	Cooling Sound Power (H)		66	67	68	72	73	72
	Cooling Usable Temperature Range	°C	-10~48	-10~48	-10~48	-10~48	-10~48	-10~48
	Heating Usable Temperature Range	°C	-15~24	-15~24	-15~24	-15~24	-15~24	-15~24
PIPE SIZE	Liquid Line Ø/Gas Line Ø	mm/inch	6.35/9.52 / 1/4"/3/8"	6.35/12.7 / 1/4"/1/2"	6.35/12.7 / 1/4"/1/2"	9.52/15.9 / 3/8"/5/8"	9.52/15.9 / 3/8"/5/8"	9.52/15.9 / 3/8"/5/8"
	Coupler Style		flaring	flaring	flaring	flaring	flaring	flaring
	Drain (Inside Diameter) Ø	mm	16	16	16	16	16	16
	Minimum Length	m	3	3	3	3	3	3
	Maximum Length	m	20	20	25	25	25	25
	Chargeless Length	m	5	5	5	5	5	5
	Additional Refrigerant	gm / m	15	15	15	30	30	30
	Maximum Height Difference (Above/Below)	m	8	8	10	10	10	10

1003-092014

Notice: AHI Carrier is committed to continuously improving its products, to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications subject to change without prior notice.

Date: October 2014. Equipment rated in accordance with 3823.2.2011 E&OE

Sales and Service: **13 COOL (13 2665)**

Level 1, 195 Chesterville Road, Moorabbin Vic 3189

ABN 47136426214 AU 22499

[carrieraustralia.com.au](http://carrieraustralia.com.au)